




AMV 80 - Series

220-240 V, 50/60 Hz

Type	Input Power W	Output Power W	Current A	Speed RPM	Protection	Approval
AMV80 CA01	33	5	0.21	1300/1550	Impedance	VDE , CE
AMV80 CA02	38	7	0.25	1300/1550	Impedance	VDE, CE
AMV80 CA03	40	10	0.35	1300/1550	Impedance	VDE, CE
AMV80 CA04	70	16	0.5	1300/1550	Therm-protector	VDE, CE
AMV80 CA05	73	18	0.5	1300/1550	Therm-protector	VDE, CE
AMV80 CA06	93	25	1.0	1300/1550	Therm-protector	VDE, CE
AMV80 CA07	120	34	1.2	1300/1550	Therm-protector	VDE, CE

Product Dimensions

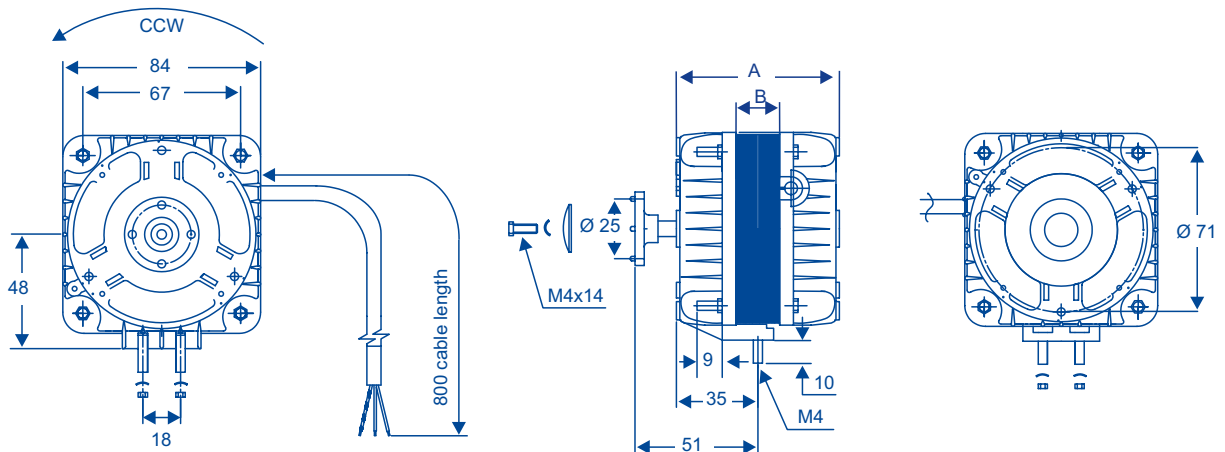

Dimensions in mm

Type	A (mm)	B (mm)
AMV80 CA 01	65	13
AMV80 CA 02	72	20
AMV80 CA 03	72	20
AMV80 CA 04	77	25
AMV80 CA 05	82	30
AMV80 CA 06	92	40
AMV80 CA 07	97	45

Ambient Temperature	Direction of Rotation	Protection / Insulation Class	Approval
-30 °C to +40 °C	CCW	IP 42 / Class B	CE